

Soler & Palau

The World's Leading Producer of Air Movement Products



SWF Centrifugal Sidewall Fans

For High Static Pressure Applications (Minimum Space)

SIDEWALL
series

Soler & Palau (S&P) USA and Canada are the most recent additions to, and are wholly owned subsidiaries of, Soler & Palau Ventilation Group which was founded in 1951. S&P Ventilation Group is the World's leading producer of air movement products with an emphasis on developing and producing leading edge products to HVAC and other associated industries.

Over the past 50 years the company has expanded its product ranges and operations within Europe and beyond. Across the globe, S&P has established the most effective means through subsidiaries, distributors and partners for the distribution of our products. Today S&P has facilities in many countries, among these are: Australia, Belgium, China, England, France, Germany, Holland, Italy, Portugal, Mexico, the USA and Canada. Worldwide, S&P is represented by an established and renowned network of distributors and partner companies.

SWF-SIDEWALL FAN (SWF) SERIES

The SWF series utilizes the same powerful (high static) motor found in the popular PV Series fans, yet the SWF series is encased in an exterior mounted housing. The outdoor rated exterior housing provides easy access from the outside of a building or dwelling. This makes the SWF a great solution for installations where attic space or easy indoor access is difficult and not suitable for traditional PV style in-line mounting. The Sidewall Fan Series (SWF) of direct drive centrifugal ventilation fans consists of five model sizes ranging from 4-8". All models are designed for direct connection in-line with standard diameter round ducting. Airflow performance values range from 119 CFM up to 416 CFM.

All SWF series models incorporate a powerful external rotor motor that has been factory matched to a nonoverloading backward curved centrifugal fan wheel.



This powerful combination enables the SWF to deliver exceptional airflow performances against high static pressure typically found in ducted ventilation systems. All motors within the SWF series are fully speed controllable using voltage or frequency control regulators.

The SWF series has been designed for easy through the wall installation. The totally enclosed motor design allows for the SWF to operate in high moisture, lint and dust laden air. All models are manufactured with high quality materials and workmanship that is supported by a comprehensive **five (5) year warranty**.

The SWF series features a corrosion resistant galvanized steel casing with a baked enamel coating that can be painted to match the exterior wall. The unit also includes a built-in backdraft damper and an extended opening exhaust grill.

The larger grill allows for the easy exhaust of "dirty" or lint laden air while the spring-loaded backdraft damper helps prevent insects, etc. from entering duct work.



Built-in Spring-loaded Backdraft Damper

Applications

The SWF series is ideally suited for a wide range of residential, commercial and industrial exhaust and intake ventilation applications. Typical applications would include the following:



Residential

- Bathrooms
- Kitchen Range Hoods
- Apartments or Townhouses



Commercial

- Conference Rooms
- Offices
- Bars & Restaurants



Industrial

- Welding Fume Extraction
- Spot Ventilation
- Workshops & Smoking Areas

Technical Specifications

All five SWF models sizes (SWF-100, 100x, 150, 150x & 200) include the following specifications:

Warranty

Five (5) year limited warranty.

Casing

- Manufactured from high grade pressed galvanized steel, with baked enamel coating.
- Removable top for easy access to motor for cleaning or inspection.
- Large grill opening for easy passing of lint and other potentially clogging materials.
- Includes prewired terminal box.

Wheel/Impeller

- Backward curved centrifugal type.
- Factory matched to an external rotor motor and dynamically balanced to eliminate vibration.

Accessories

- A wide range of accessories is available to complete the most demanding installation.


Motors

- Totally enclosed permanent split capacity start and run external rotor motors.
- 115V 60Hz (single phase) electrical connection.
- Permanently sealed, self lubricating precision ball bearings.
- Safety Thermal Overload Protection Cut-Out (Automatic Reset Type).
- All models are suitable for working airstreams up to 140°F.

Code Approval

- All models have been independently safety tested by Underwriters Laboratories, Inc. and are UL and cUL listed.
- The SWF product range is certified by the Home Ventilating Institute (HVI) for Air Performance.

Dimensions inches/mm

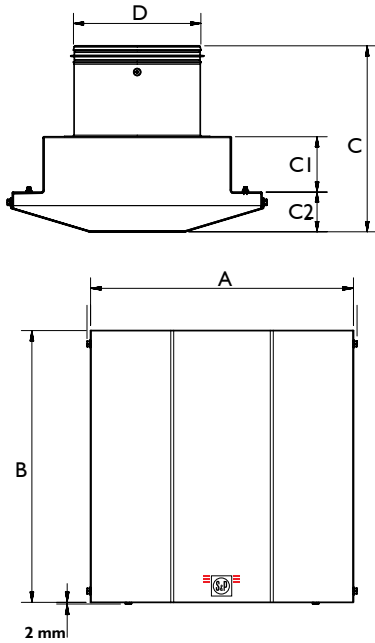

Model	A	B	C	C1	C2	D
SWF-100	13 1/4 337	13 1/4 337	9 228	3 76	2 7/16 62	4 100
SWF-100x	13 1/4 337	13 1/4 337	9 228	3 76	2 7/16 62	4 100
SWF-150	15 1/2 394	13 1/4 337	10 3/16 256	3 76	2 7/16 62	6 150
SWF-150x	15 1/2 394	16 1/16 408	10 254	3 3/16 81	2 7/16 62	6 150
SWF-200	15 1/2 394	16 1/16 408	11 7/16 290	3 3/8 87	2 7/16 62	8 200

Performance

Model	CFM vs. Static Pressure (SP) Ins. WG								
	0"	0.125"	0.25"	0.375"	0.5"	0.75"	1.0"	1.25"	1.5"
SWF-100	119	106	92	78	64	44	26	-	-
SWF-100X	171	162	152	142	118	90	66	46	28
SWF-150	235	221	197	181	168	122	81	60	27
SWF-150X	354	332	310	287	266	230	192	147	96
SWF-200	416	395	368	341	324	287	233	184	132



Sound

Fan sound levels are measured in sones. At this time there are no sone level test standards available through HVI due to the fact that remote mounted fan noise levels are in proportion to the following: type of duct, length of duct, fan distance from the intake source and other random factors. It is generally accepted that remote mounted venting is quieter than standard (in room) venting.

Accessories



Soler Palau USA
6393 Powers Avenue
Jacksonville, FL 32217
800-961-7370
800-961-7379
www.solerpalau-usa.com

Soler & Palau Canada
61A Baywood Road
Toronto, ON M9V 3Y8
866-733-0233
866-385-5346
www.solerpalaucanada.com

Distributed By: