



P: 866.733.0233
www.solerpalaucanada.com


MODEL RED CENTRIFUGAL ROOF EXHAUSTER DIRECT DRIVE

FEATURES

- AMCA Air & Sound Licensed
- UL Listed-Standard 705 (optional)
- Aluminum Construction
- Stainless Steel Alloy Exterior Fasteners
- Speed Controllable Motors
- 5 Year Fan Warranty
- 1 Year Motor Warranty
- Aluminum Birdscreen
- Internal Conduit Wiring Chase
- Electrical Disconnect



Standard 705
(optional)

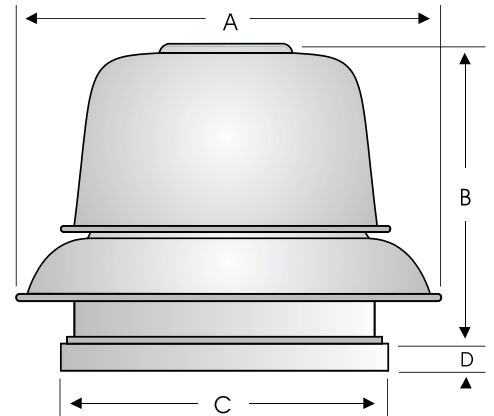

Size	Dimensions (Inches)							Average Ship Wt. (lbs)
	A	B	C	D	E	F	G	
6	21 3/4	12	16 1/2	1 3/4	11	14 3/4	11 3/4	50
8	21 3/4	15 3/4	16 1/2	1 3/4	11	14 3/4	11 3/4	50
10	21 3/4	17 1/4	16 1/2	1 3/4	11	14 3/4	11 3/4	50
12	33 1/8	23 1/2	24	2	18	22 1/4	19 1/4	120
15	33 1/8	23 1/2	24	2	18	22 1/4	19 1/4	124

- A - Outside diameter of unit.
 B - Height of unit above top of curb. (MAX")
 C - Inside dimension of square curb cap.
 D - Depth of curb mounting flange
 E - O.D. backdraft damper (box frame type).
 F - Outside dimension of factory built prefab curb.
 G - Recommended roof opening.
 (Inside dimension of factory built prefab curb)

FAN SPECIFICATIONS									MOTOR SPECIFICATIONS				
Line	Qty.	Model No.	Tag	CFM	SP	Fan RPM	BHP	Sones	HP	Volts	Phase	Hertz	Encl
1													
2													
3													
4													
5													

ACCESSORY ITEMS					1	2	3	4	5	ACCESSORY ITEMS					1	2	3	4	5
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									

Project: _____ Submitted: _____
 Customer: _____ Approved: _____
 Location: _____