


# MODEL TXD DIRECT DRIVE CENTRIFUGAL UPBLAST ROOF EXHAUSTER



61 A Baywood Road  
Toronto, Ontario M9V 3Y8  
P: 866.733.0233 / F: 866.358.5346  
www.solerpalaucanada.com

## STANDARD CONSTRUCTION FEATURES

- Aluminum Housing with Stainless Steel Exterior Fasteners.
- Aluminum Backward Inclined Wheel.
- Prepunched Aluminum Curb Cap with Welded Corners.
- Single Piece Aluminum Birdscreen & Windband.
- Neoprene Vibration Isolators.
- Conduit Wiring Chase.
- Factory Disconnect Switch or Plug Type. (Except XP & 2 Speed).

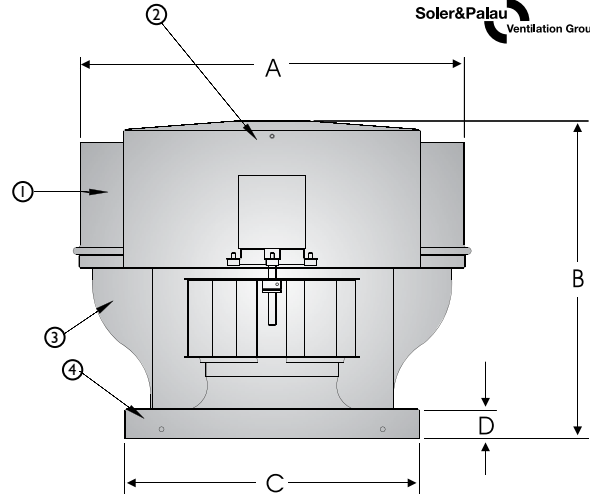

Soler&Palau  
Ventilation Group

SIZE	DIMENSIONS (IN.)			
	A	B	C	D
6 / 8	24	22	16 1/2	2
10	27 1/4	22	16 1/2	2
12	31 1/2	23	24	2
14 / 15	31 1/2	23	24	2

A - Outside diameter of unit.  
B - Height of unit.  
C - Inside dimension of square curb cap.  
D - Depth of curb mounting flange.



OPTIONAL UL 705  
(Must be specified) UL 762 (Grease)

SIZE	DIMENSIONS (IN.)			ALUMINUM METAL GAUGES				FAN WT. (LBS)	AVG. SHIP WT. (LBS)
	DAMPER OD	ROOF OPENING	CURB OD	WIND BAND ①	MOTOR COVER ②	SHROUD ③	BASE ④		
6 / 8	11	12	15	.050	.080	.063	.050	45	76
10	11	12	15	.050	.050	.063	.063	70	105
12	18	19 1/4	22 1/4	.050	.050	.063	.063	80	115
14 / 15	18	19 1/4	22 1/4	.050	.050	.063	.063	85	120

FAN SPECIFICATIONS									MOTOR SPECIFICATIONS				
Line	Qty.	Model No.	Tag	CFM	SP	Fan RPM	BHP	Sones	HP	Volts	Phase	Hertz	Encl
1													
2													
3													
4													
5													

ACCESSORY ITEMS					ACCESSORY ITEMS						
	1	2	3	4	5		1	2	3	4	5
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					