




# 2525.5UL - Rotary Speed Control

P: 800.961.7370  
www.solerpalau-usa.com

Designed for mounting in a 2" X 4" electrical wall box. It operates from 115 VAC, 50/60 Hz and has a maximum rating of 5.0 Amps @ 40°C. The 2525.5UL provides infinitely variable speed motor control for Shaded Pole, Permanent Split Capacitor and Universal (AC/DC) motors. The variable speed motor control contains an on/off line switch, a high gain RFI noise suppression filter, a minimum speed trimpot and a flame retardant ABS enclosure. Applications include range hoods, vibrators, humidifiers, fireplace blowers, fans, laminar flow hoods, heat tunnels and stirrers. Mounting kit that includes individual packaging with dial plate, knob, mounting screws, wire connectors and instructions.

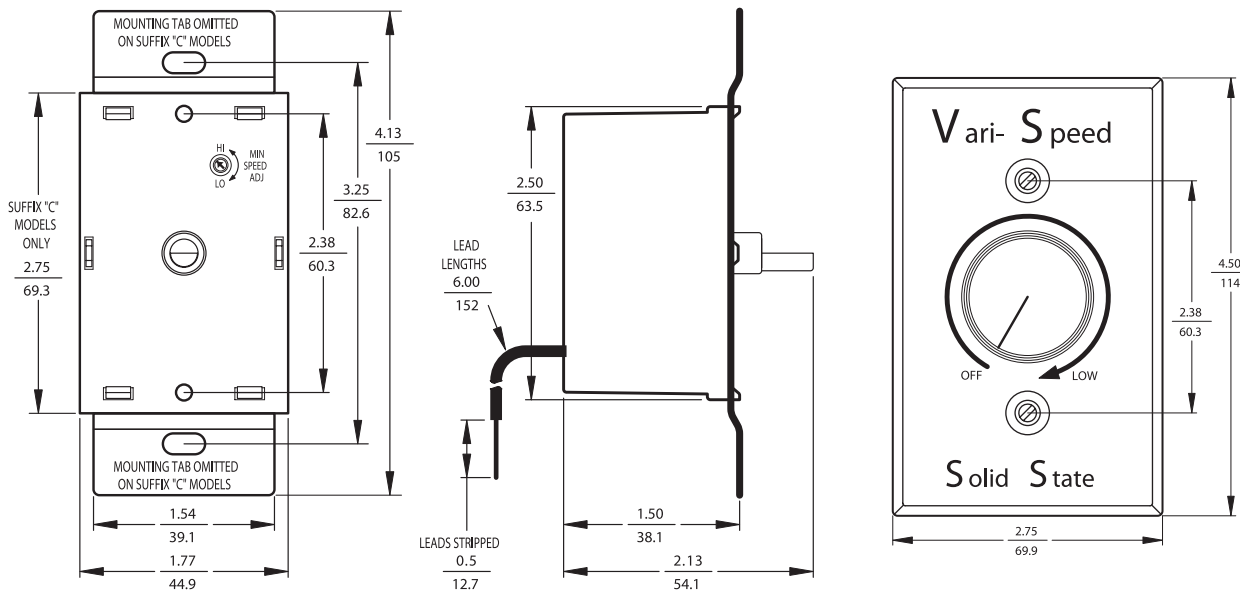

## Electrical Ratings

Model No.	AC Line Input Voltage (Volts AC - 50/60 Hz)	Maximum Current Rating (Amps RMS)	Ambient Temperature (°F / °C)
2525.5UL	115	5	104 / 40

ACCESSORY MODEL	1	2	3	4	5	REMARKS

Project: _____	Submitted: _____
Customer: _____	Approved: _____
Location: _____	

For more information contact us at [www.solerpalau-usa.com](http://www.solerpalau-usa.com) or 1.800.961.7370 for additional submittal drawings.

Soler & Palau will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.

