


Dimensions



Specifications

- Kit includes PCRD-P2, PCLMK and wiring extender
- 3-hour rating ceiling radiation dampers
- UL Listed Link (165°F Standard)
- UL Approved flexible fire blanket
- Ceramic fiber with fiberglass cover
- Roll-formed frame 22 g. galvanized steel



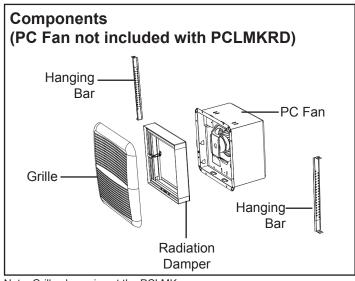

Note: Grille shown is not the PCLMK

	Standard Grille	PCLK	PCLEDK	РСМК	PCLMK	PCHS	PCSC	PC3S	PCMG
PCLMKRD	-	-	-	-	Included	-	-	~	-

ACCESSORY MODEL	1	2	3	4	5	REMARKS

PROJECT:	_ CONTRACTOR:	
LOCATION:	_ REVISION DATE:	
FORM NO.:	_ SUBMITTED BY:	DATE:
ENGINEER:	APPROVED BY:	DATE:

For more information contact us at www.solerpalau-usa.com or 1.800.961.7370 for additional submittal drawings.

S&P will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.

